

Note on ProfiControl cabling

Variant 1

00300-2-443 ProfiControl Standalone Kit for current requirements up to 25A

For operating APV implements without a tractor ISOBUS. Suitable for applications with a maximum current requirement of 25 A.


Compatible with

- MDD and MDP (single units only)
- MDG and MDC individually or as a set of two implements
- PS120-PS500 with electric and hydraulic fans
- HP TWIN and HP Smart TWIN with electric and hydraulic fans
- HP 800-1600
- LF 600
- VS and GP Load Sensing

The following is required on the tractor-side

- 3-pin power socket with 25A fuse
- Optional 7-pin socket for reading the linkage control and speed signal

Index	item number	Description
A	00300-2-443	ProfiControl Standalone Set up to 25A current requirement
B	-	APV implement with ISOBUS functionality
C	00410-2-266	7-pin signal cable for ProfiControl

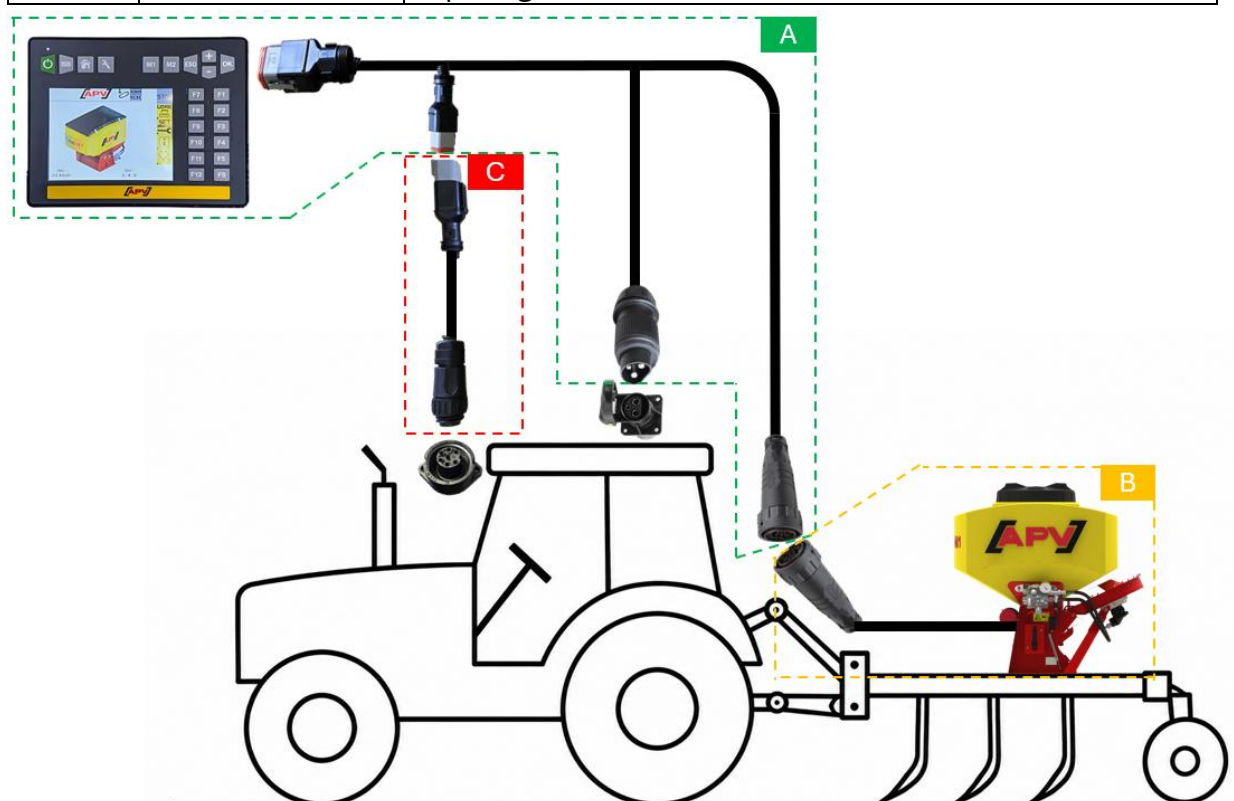

Variant 2

00300-2-001033 ProfiControl ISOBUS retrofitting kit

For tractors without an existing ISOBUS system. This kit retrofits a standardised ISOBUS socket to the tractor, enabling the operation of all ISOBUS implements. The power supply is provided directly from the tractor battery.


Compatible with

all ISOBUS-compatible implements, including both APV and third-party brands

The following is required on the tractor-side

- Mounting of the A2 wiring harness on the tractor (included in the set)
Wiring directly to the battery to provide earth and 12V
Wiring to the ignition positive terminal
- Optional 7-pin socket for reading the linkage control and speed signal

Index	item number	Description
A & A2	00300-2-001033	ProfiControl ISOBUS retrofitting kit
B	-	APV implement with ISOBUS equipment
C	00410-2-266	7-pin signal cable for ProfiControl

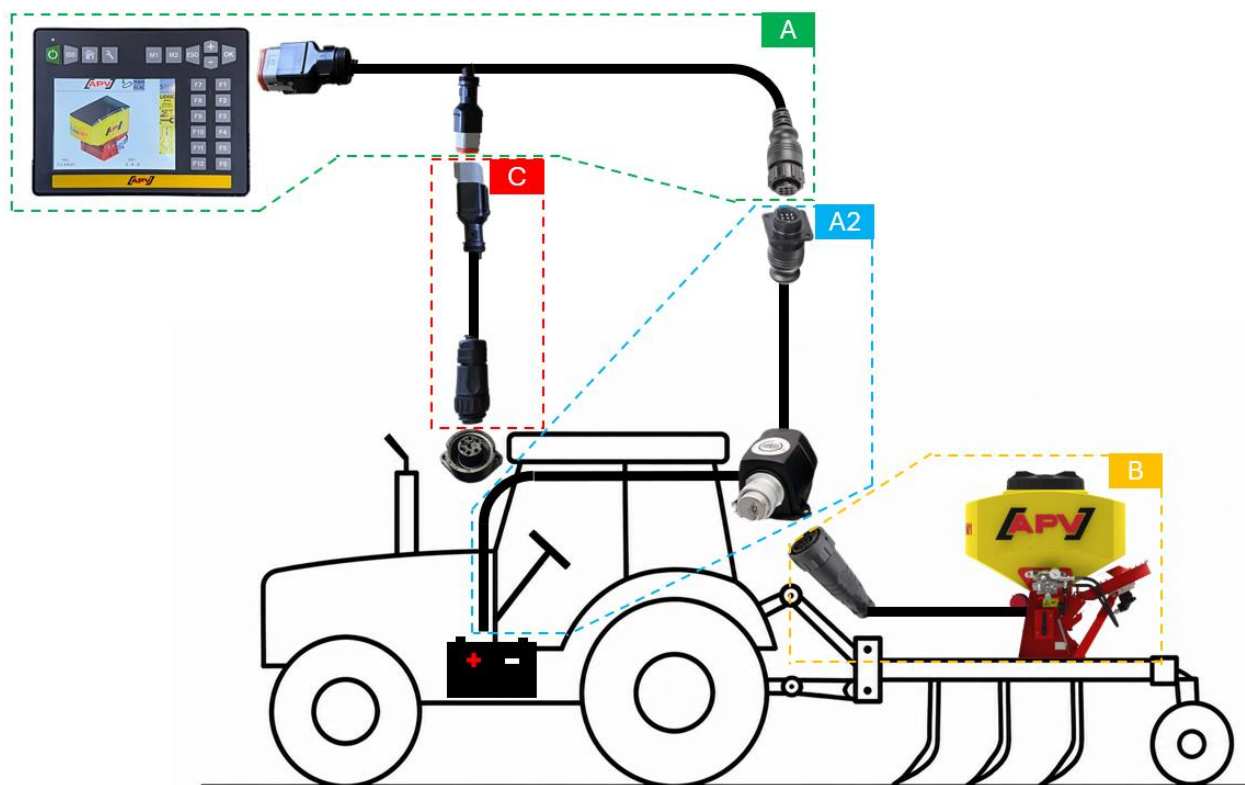

Variant 3

00300-2-445 ProfiControl InCab auxiliary terminal set

Can only be used on tractors with ISOBUS as a secondary terminal via the InCab socket.

Compatible with

all ISOBUS-compatible implements, including both APV and third-party brands

The tractor-side equipment must have

- The tractor must be fitted with a complete and standard-compliant ISOBUS system

Index	item number	Description
A	00300-2-445	ProfiControl InCab auxiliary terminal set
B	-	APV implement with ISOBUS functionality

